


SECURITY SLEEVE ANCHOR ULTRA 6 LOBE (3/8" dia.)



FAST & EASY TO INSTALL IN CONCRETE, BRICK AND STONE-BASED MATERIALS

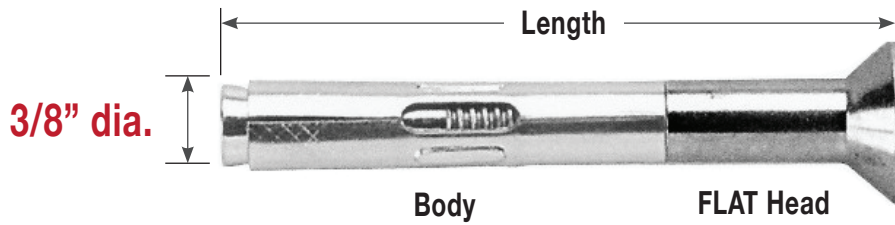

SIZE (DIA. x LENGTH) * inch	PART NUMBER Stainless Steel Head, Zinc Body	PART NUMBER Stainless Steel Head & Body
3/8 x 2-3/4	375.2750TFSZ	375.2750TFSS
3/8 x 4	375.400TFSZ	375.400TFSS
3/8 x 5	375.500TFSZ	375.500TFSS
3/8 x 6	375.600TFSZ	375.600TFSS

* Flat head anchor lengths are measured as overall length.

* To determine the minimum length of anchor required, add the thickness of the material to be fastened to the minimum embedment for the diameter of anchor being installed.

Installation

1. Drill a hole into the base material at least 3/8" deeper than the anchor length. Make the hole the same size as the anchor diameter (3/8" hole for 3/8" anchor).
2. Blow the hole clean using compressed air. Alternatively, drill the hole deep enough to accommodate embedment length and drilling dust.
3. Install the Ultra 6 Lobe security anchor through the fixture directly into the base material.
4. Tighten to required installation torque (see below).

IMPORTANT: Make sure the hole in the item being attached is slightly larger than the anchor diameter.

Allowable Tension and Shear Loads in Normal-Weight Concrete

SIZE inch	MIN. EMBED. DEPTH inch	CRITICAL EDGE DIST. inch	CRITICAL SPACING DIST. inch	TENSION LOAD						SHEAR LOAD			INSTALL. TORQUE ft. / lb.
				$f'_c \geq 2,000$ psi (13.8 mPa) CONCRETE			$f'_c \geq 4,000$ psi (27.6 mPa) CONCRETE			$f'_c \geq 2,000$ psi (13.8 mPa) CONCRETE			
				ULTIMATE lb.	STD. DEV. lb.	ALLOW lb.	ULTIMATE lb.	STD. DEV. lb.	ALLOW lb.	ULTIMATE lb.	STD. DEV. lb.	ALLOW lb.	
3/8	length + 3/8"	3-3/4	6	1,600	294	400	2,680	450	670	3,080	223	770	15

¹ The tabulated allowable loads are based on a safety factor of 4.0.

